




Stopping plug type SP

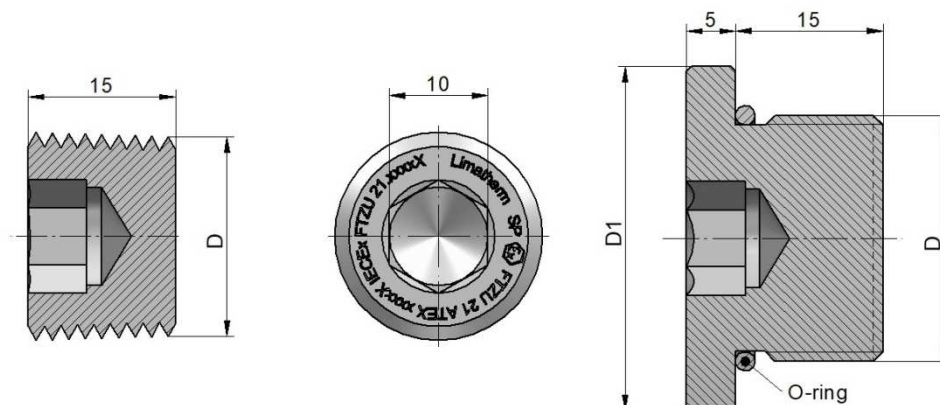

Thread size D	D ₁ [mm]	Stopping plug material	O-ring	Seal material
½ NPT	-	Carbon steel 1.0715 zinc plated	-	-
¾ NPT			-	
M20×1.5	30	Stainless steel 1.4301 / AISI 304	Ø18×2	VMQ silicone O-ring
M24×1.5	35		Ø22×2	
M25×1.5			Ø23×2	FKM O-ring

Ordering

SP - - -

Thread size

N2 = ½ NPT
N3 = ¾ NPT
M2 = M20x1,5
M24 = M24x1,5
M25 = M25x1,5

SP material



= carbon steel
SS = stainless steel

O-ring material

4 = VMQ
5 = FKM

Ordering examples: **SP-N2**
SP-N3-SS
SP-M2-SS-4
SP-M24-5



Technical data		
	VMQ	FKM
Ambient temperature	-60 ÷ +150 °C	-20 ÷ +180 °C
Service temperature	-60 ÷ +150 °C	-20 ÷ +180 °C
Degree of protection	IP66 / IP68	
Protection marking / Certificate No.		
ATEX		
 1026  II 2G Ex db IIC T3 Gb II 2G Ex eb IIC T3 Gb II 2D Ex tb IIIC T150/180°C Db I M2 Ex db I Mb I M2 Ex eb I Mb		
FTZU 21 ATEX 0108X		
IECEX		
Ex db IIC T3 Gb Ex eb IIC T3 Gb Ex tb IIIC T150/180°C Gb I M2 Ex db I Mb I M2 Ex eb I Mb		
IECEX FTZU 22.0003X		